



# ROUND BOTTOM FRAC TANK





# ROUND BOTTOM FRAC TANK

## SPECS

### U bottom specs

#### Dimensions:

Length: 46' 8"; width: 8' 6"; Height: 10' 6"

Capacity: 500 BBL

Floor: 1/4" PL,

Floor support: 2, 4x6, 3/16"

square tube

#### Walls:

1/4" PL solid welded;

Corrugated steel;

Corrugations 24" on center

Roof: Flat top, 1/4" PL solid welded

#### Drain / Fill:

4" Floor Drain at rear end

4" Fill pipe (candy cane) to roof at rear

4" Suction line connection at front turned down to floor sump

6" flanged front manifold connection; connected to gel line.

Gel line with 6 - 1 1/2" sprayer outlets

8" flanged front manifold connection with turn down to floor sump

#### Manway:

20" Manway on front

24" Manway on the side in front of axle

1 Non-sealed hatch on roof

Pick up: Standard 5th wheel king pin

Welds: All continuous except substructure crossmembers

Axle, suspension and wheels: 30,000 lbs.

Spring suspension

Air brakes

11R x 22.5" Bias tires on steel disk wheels

Access: Front stairway

Tank pressure / Vacuum relief vent

Outside color: Primer – VP38, paint – enamel polyurethane A-76

Inside coating: Primer – International enviroline 2405 Hybrid epoxy,

Color: Green, light gray

#### Options:

Special sizes

Open top design

Fixed or removable steam coils

Color by dealer's choice

Finish: Per customer specifications

## Get in touch

 Jimmy 915-301-6751

 jkelgordo@gmail.com

 Ivan F. 915-256-6602

 ivansalespt@gmail.com

# STRAPPING CHART

INCHES	GALLONS	INCHES	GALLONS	INCHES	GALLONS	INCHES	GALLONS	INCHES	GALLONS
1	24.10	24	2613.74	47	6977.50	70	12004.61	93	17031.72
2	67.94	25	2767.99	48	7196.07	71	12223.18	94	17250.29
3	124.41	26	2924.31	49	7414.64	72	12441.75	95	17468.86
4	190.92	27	3082.49	50	7633.21	73	12660.32	96	17687.43
5	265.93	28	3242.44	51	7851.78	74	12878.89	97	17906.00
6	348.42	29	3404.03	52	8070.35	75	13097.46	98	18124.57
7	437.60	30	3567.18	53	8288.92	76	13316.03	99	18343.14
8	532.84	31	3731.78	54	8507.49	77	13534.60	100	18564.71
9	633.66	32	3897.73	55	8726.06	78	13753.17	101	18780.28
10	739.61	33	4064.95	56	8944.63	79	13971.74	102	18998.85
11	850.35	34	4233.33	57	9163.20	80	14190.31	103	19217.42
12	965.54	35	4402.79	58	9381.20	81	14408.88	104	19435.99
13	1084.01	36	4573.23	59	9600.34	82	14627.45	105	19654.56
14	1208.01	37	4791.81	60	9818.91	83	14846.02	106	19873.13
15	1335.19	38	5010.37	61	10037.48	84	15064.59	107	20091.70
16	1465.65	39	5228.94	62	10256.05	85	15283.16	108	20310.27
17	1599.39	40	5447.51	63	10474.62	86	15501.76	109	20528.87
18	1736.23	41	5666.08	64	10693.19	87	15720.30	110	20747.41
19	1876.01	42	5884.65	65	10911.76	88	15939.87	111	20965.98
20	2018.57	43	6103.22	66	11130.33	89	16157.44	112	21184.55
21	2163.74	44	6321.79	67	11348.90	90	16376.01	113	21403.12
22	2311.41	45	6540.36	68	11567.47	91	16594.58	114	21621.69
23	2461	46	6758.93	69	11786.04	92	16813.15	115	21840.26
								116	22058.83





## U-BOTTOM FRAC TANK





2026

# Frac Tank Interior

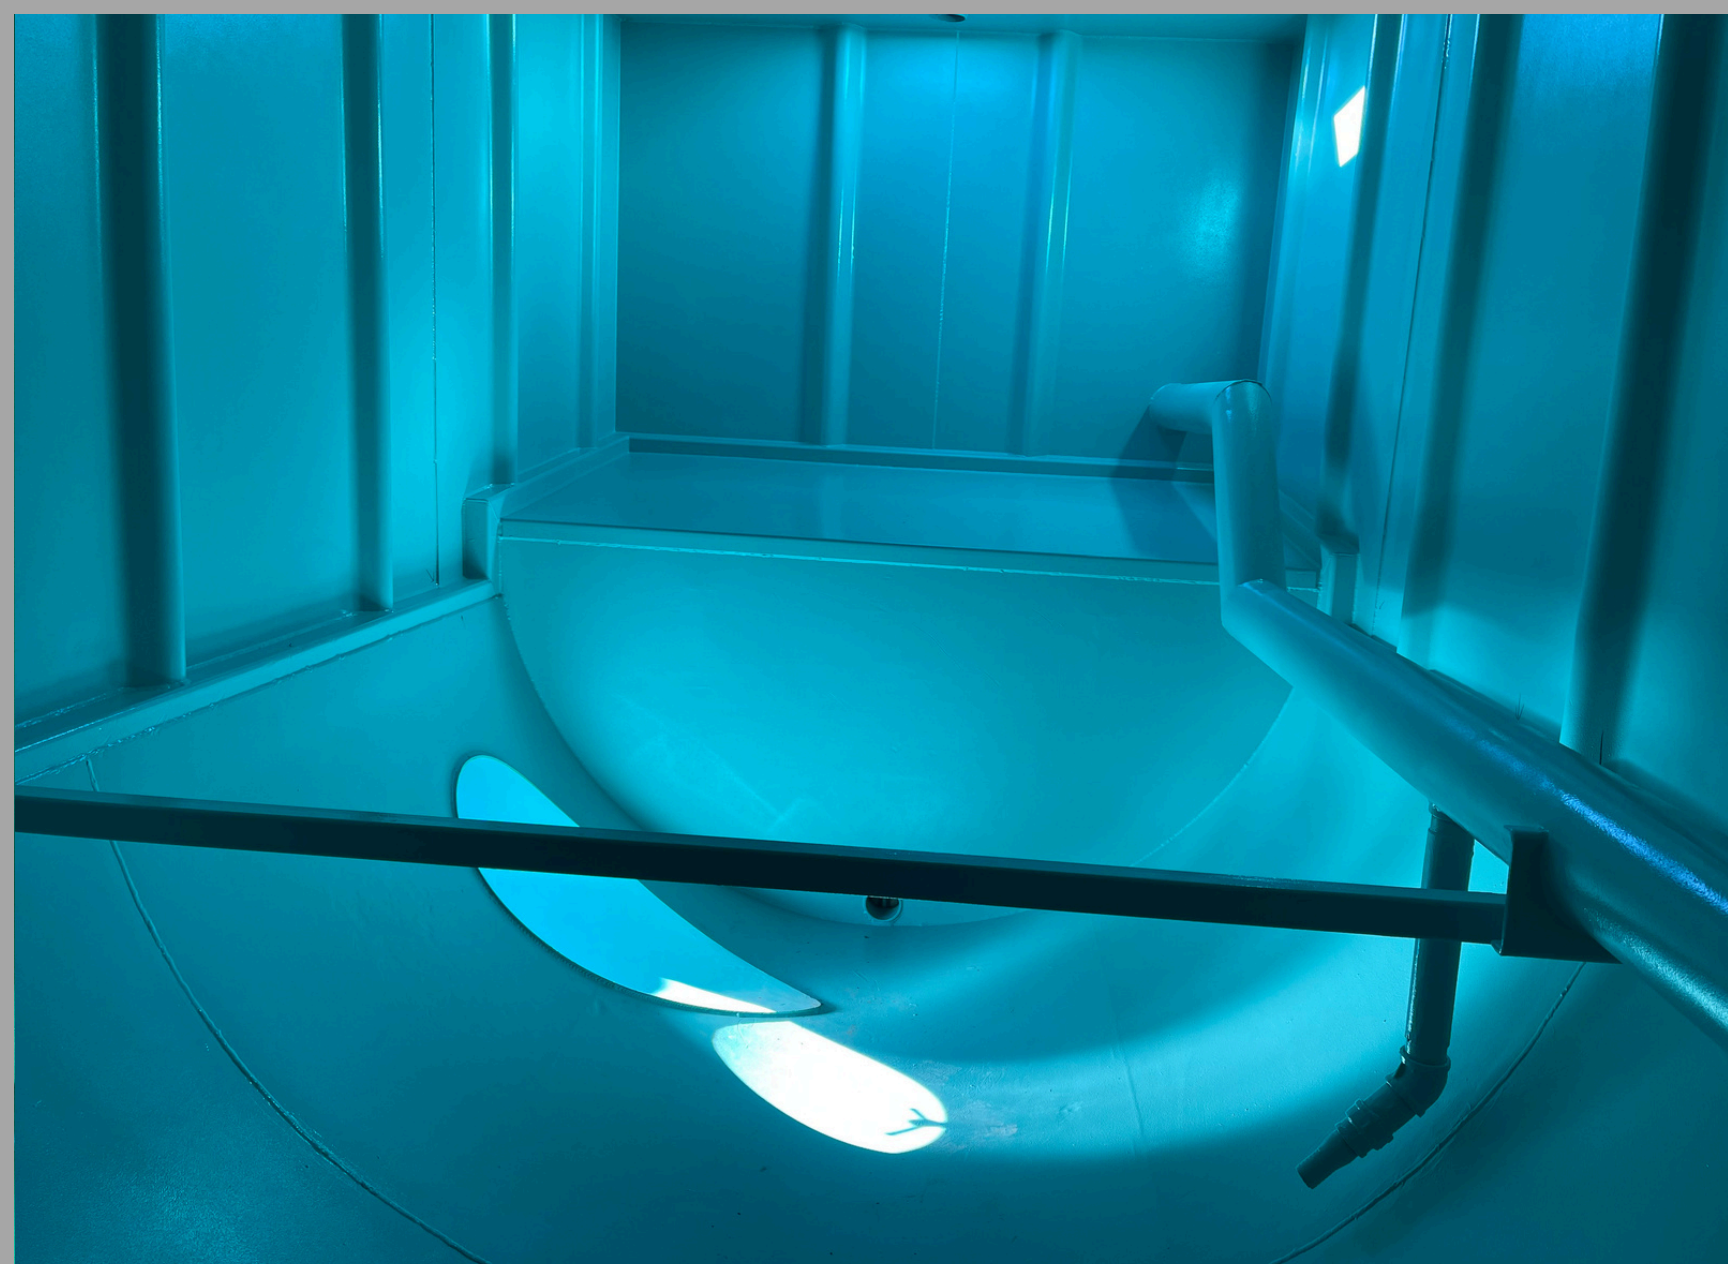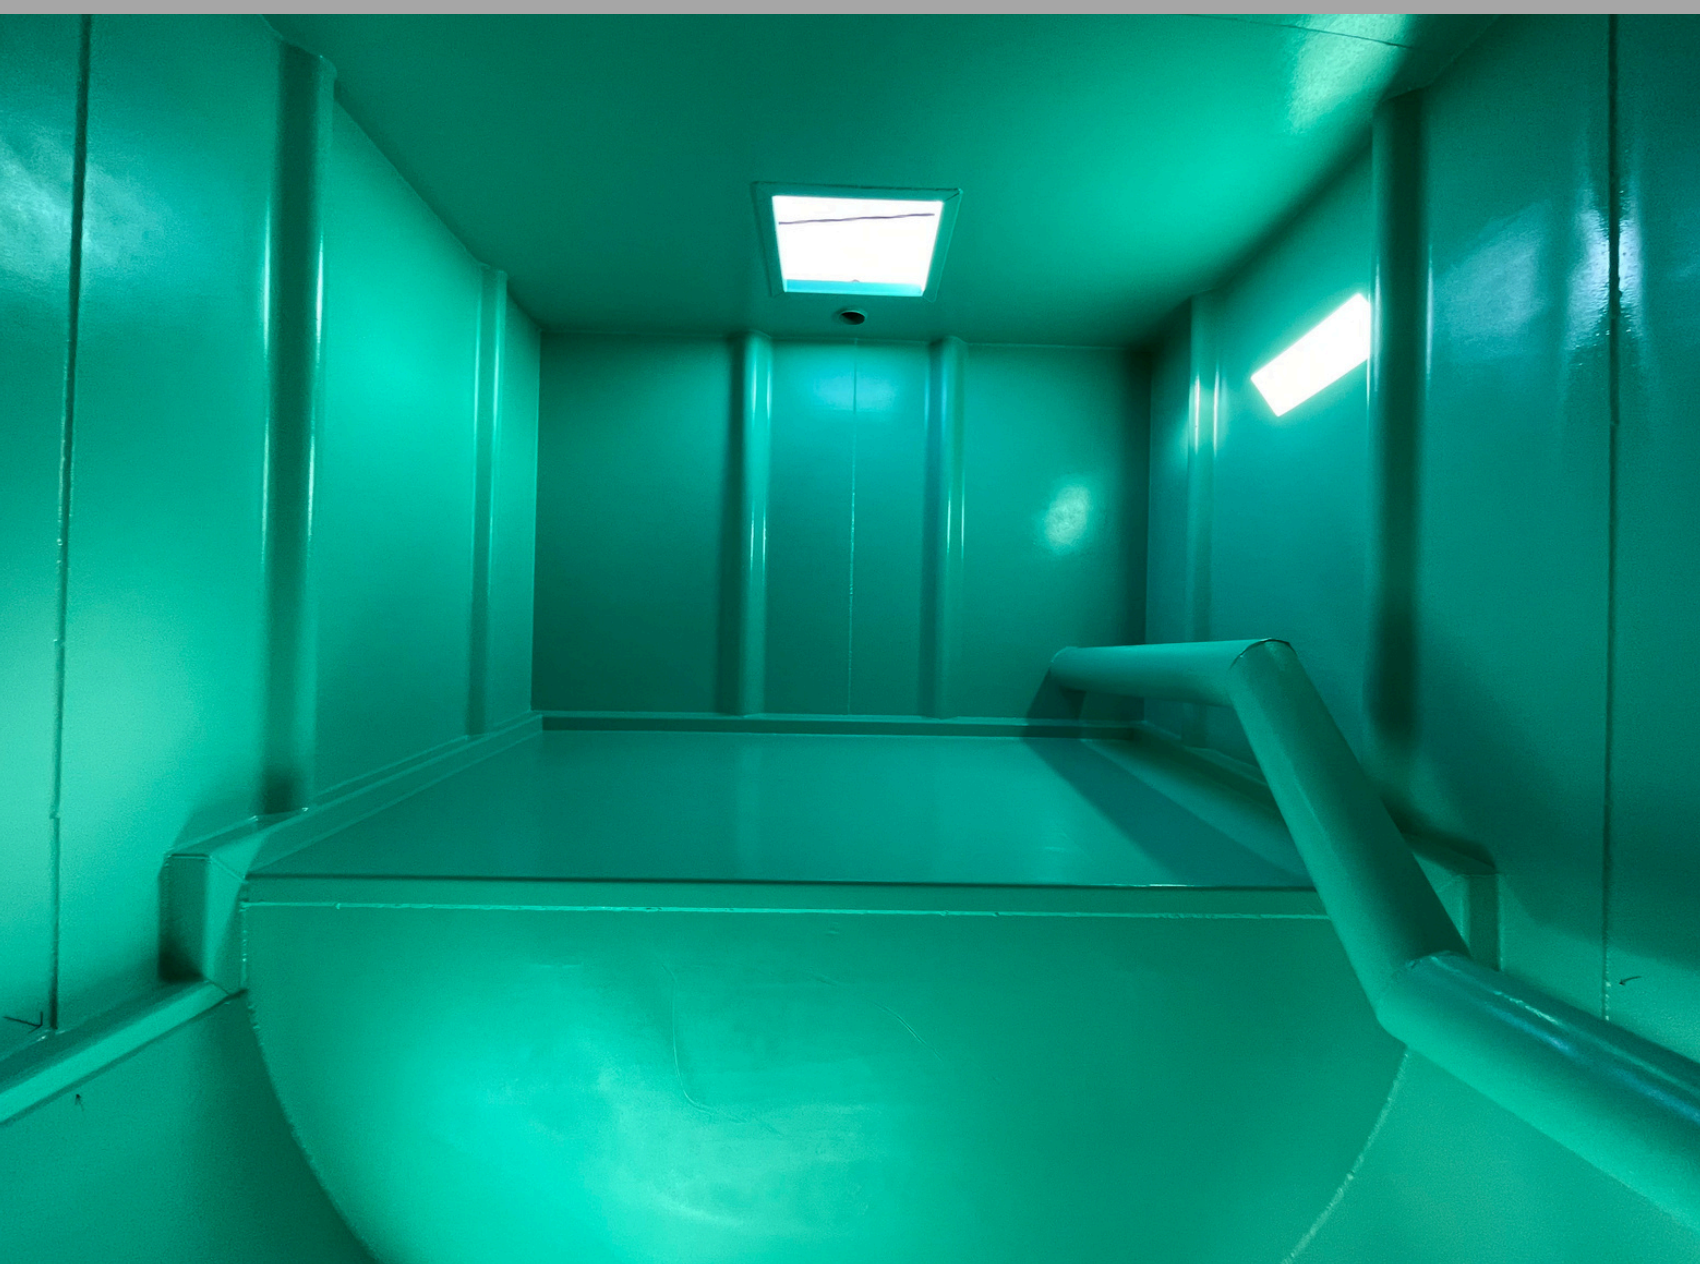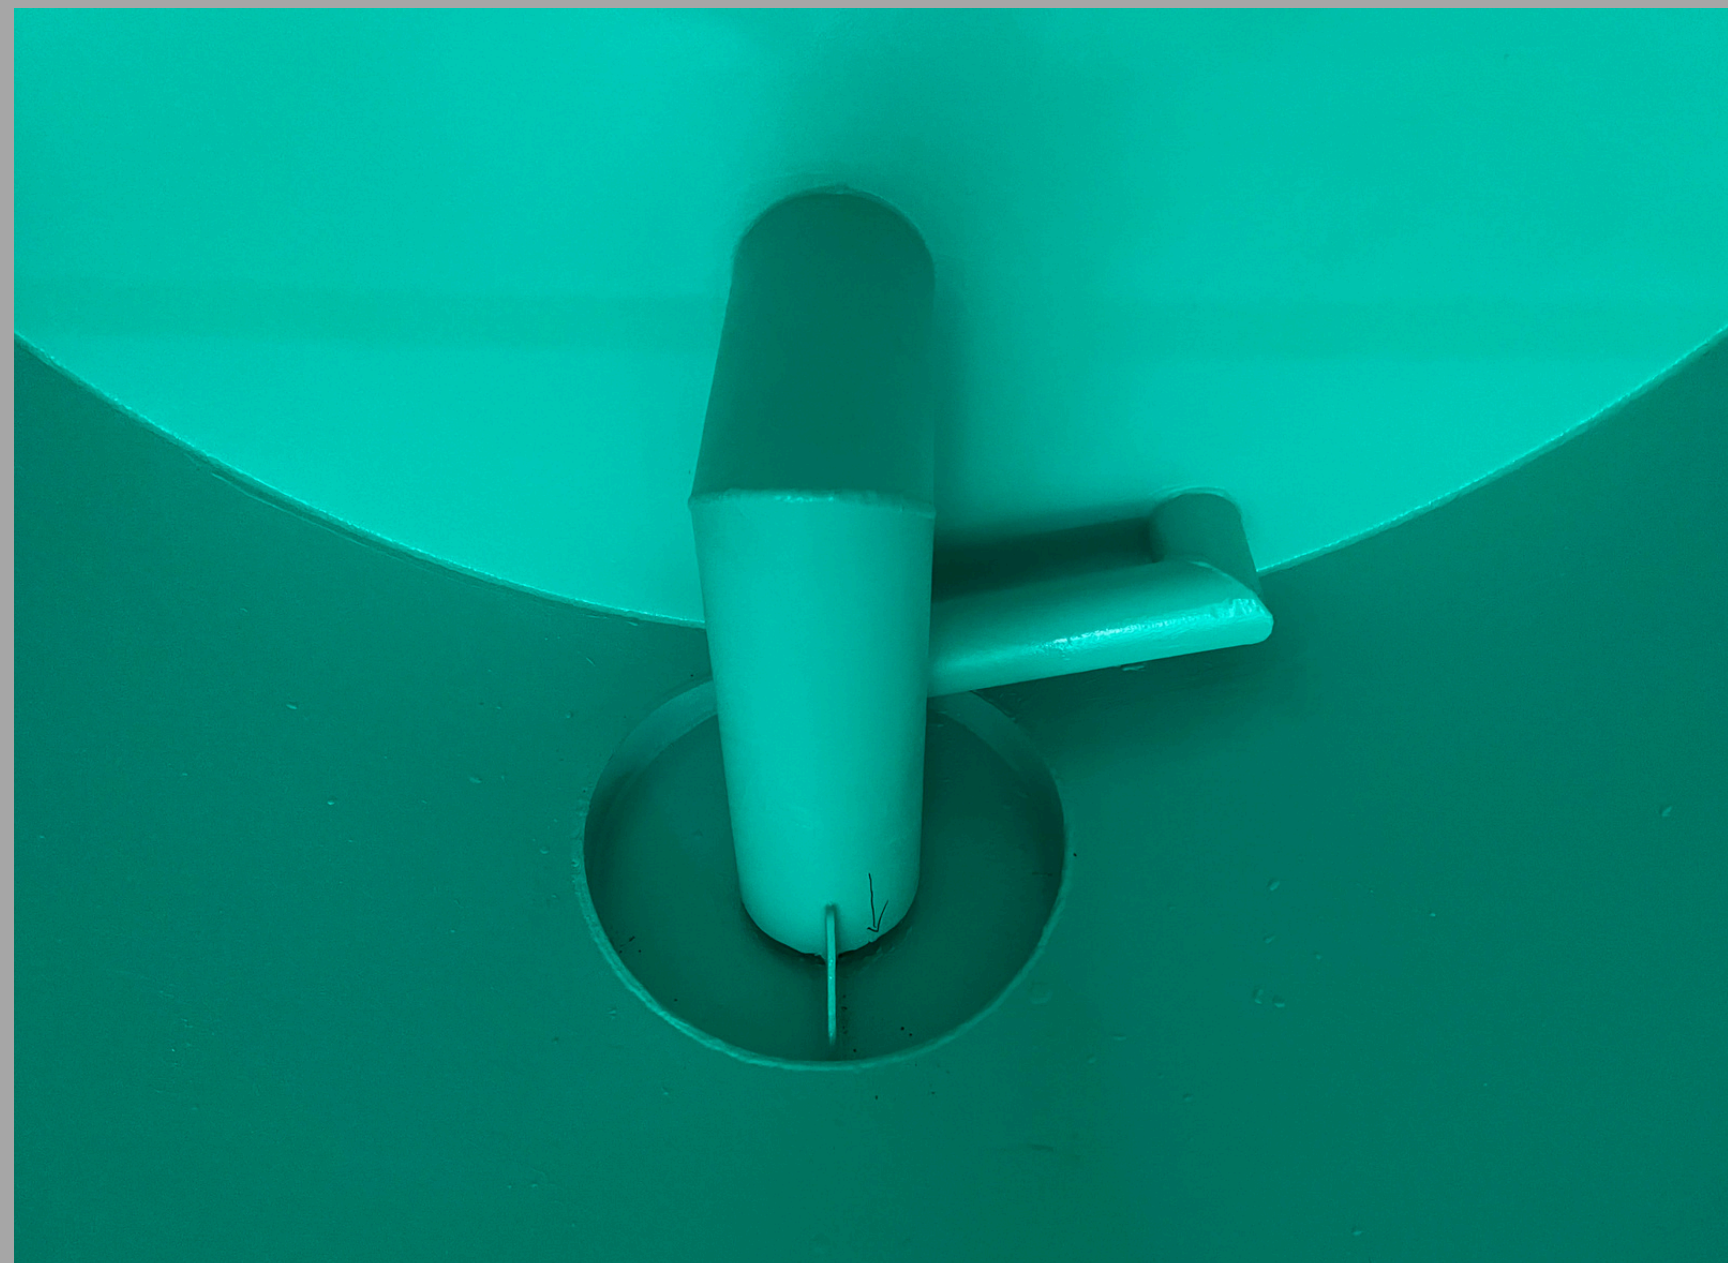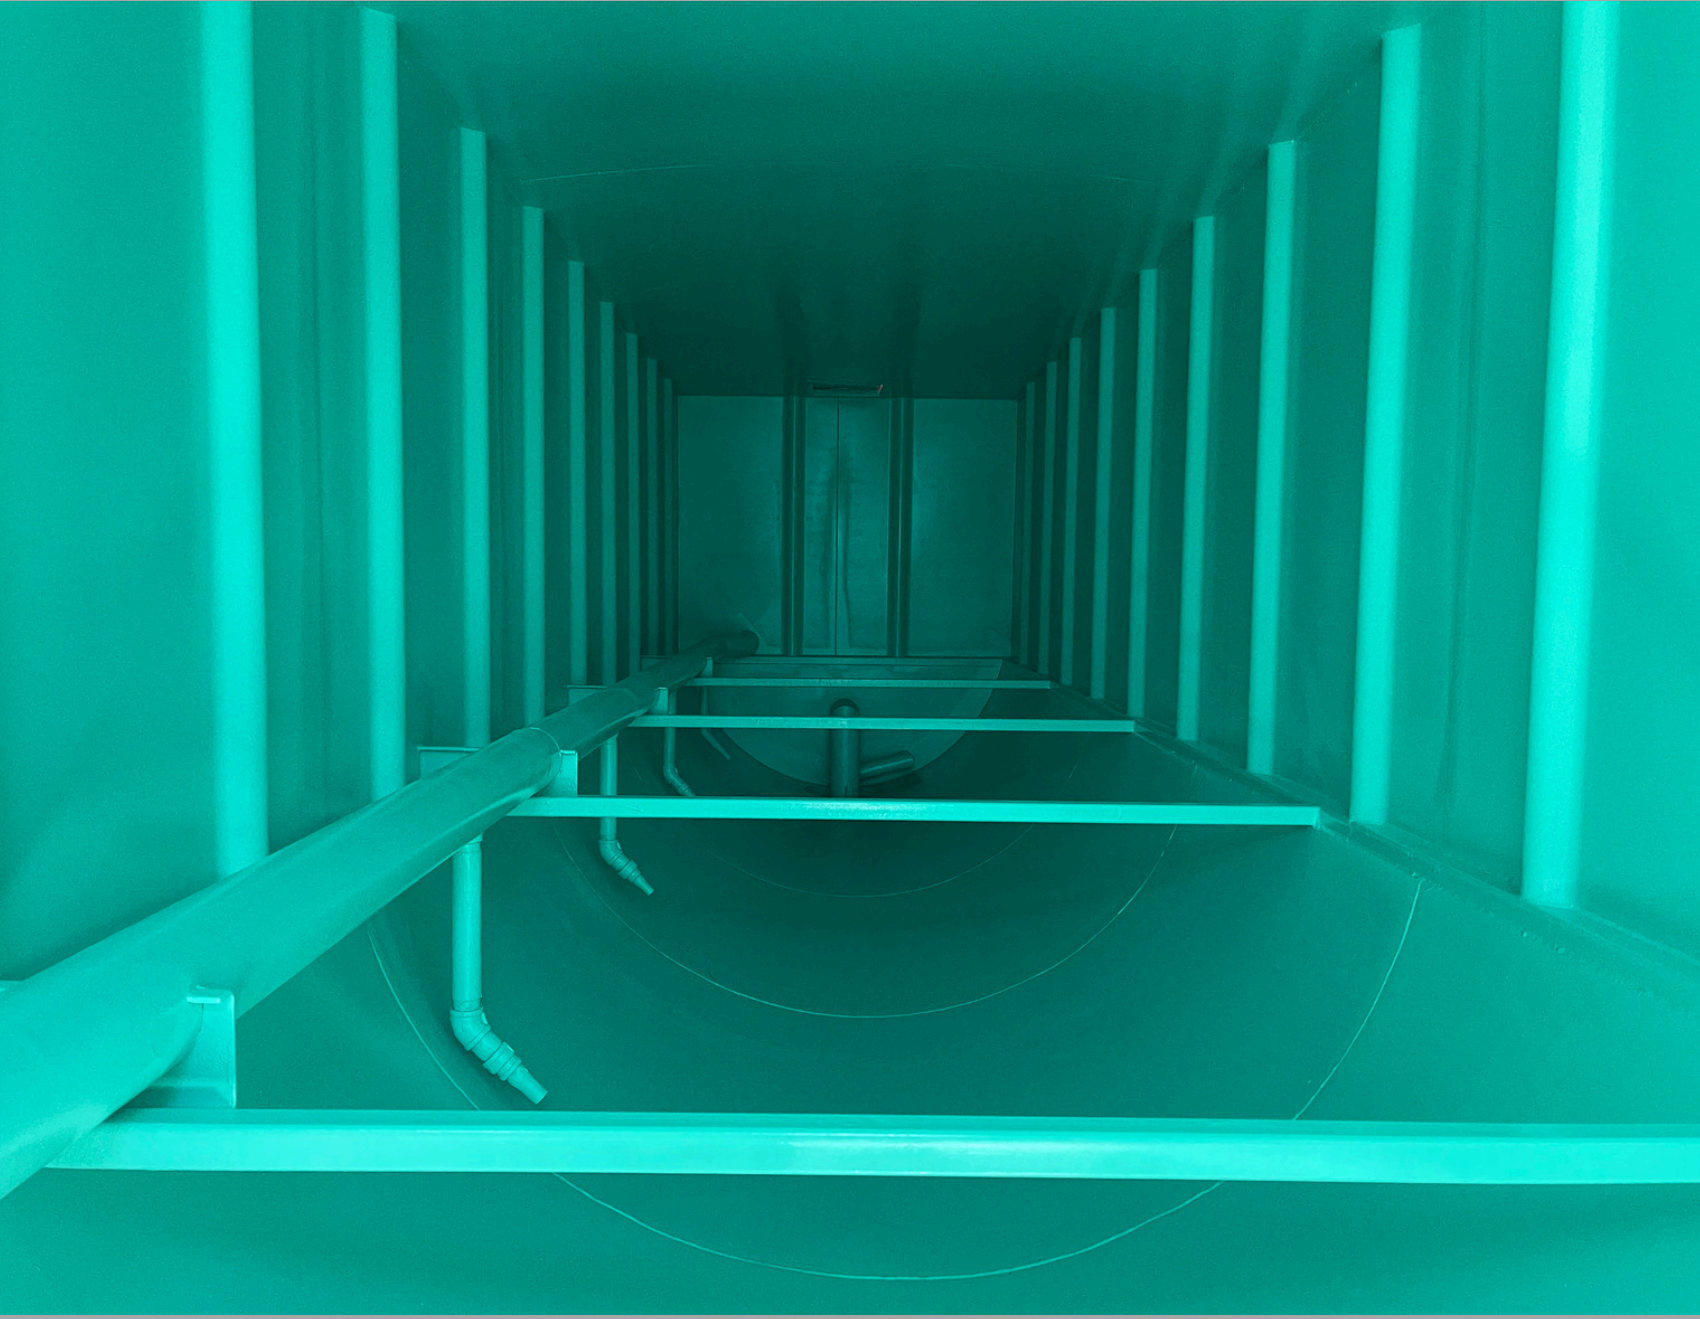

 CAMPO 51 T, NAMIQUIPA, CHIHUAHUA MEXICO. C.P. 31978